## Press Presse

Regensburg, 19. July, 2018

# A good view for security cameras: infrared LED provides light for razor sharp images

New SFH 4718A cuts the size and cost of illumination units for CCTV systems

Osram Opto Semiconductors is expanding its proven Oslon Black portfolio for infrared illumination with the addition of an infrared LED with a narrower beam angle of  $\pm 25^{\circ}$ . Thanks to the new SFH 4718A IRED, illumination units for camera systems with a medium capture range no longer require secondary optics. The Oslon Black family now offers a wide selection for the most varied of infrared-based applications, taking in four power classes, three wavelengths and three beam angles.

"With the addition of the SFH 4718A, the Oslon Black portfolio now comprises three wavelengths (810 nm, 850 nm and 940 nm) and three beam angles ( $\pm 25^{\circ}$ ,  $\pm 45^{\circ}$  and  $\pm 75^{\circ}$ ). These are flanked by four different power levels, with optical outputs ranging from 0.3 W right through to 2 W", said Jörg Heerlein, Marketing Emitter Laser Sensor at Osram Opto Semiconductors. "Since all the products are based on the same package, the emitters are easy to combine. And since the footprint remains identical, an existing design can also be easily upgraded with a new variant."

The Oslon Black series from Osram Opto Semiconductors spans all types of infrared illumination. Key applications include the illumination of areas monitored by closed-circuit television (CCTV) systems using infrared light. CCTV is used, for instance, to monitor public spaces, parking lots and company premises, as well as museums and bank foyers. Adding infrared illumination ensures that the camera delivers high-quality images regardless of the prevailing light conditions. The IRED can also be used for automatic license plate recognition systems.



In the low output range a new version with a narrower beam angle of ±25° is now available on the market. Particularly for camera systems with a medium capture range this means that the illumination unit can be designed without additional secondary optics. This makes the overall system more compact and cost-effective. At the same time, the SFH 4718A provides an excellent radiant intensity of 730 W/sr. At a current of 1 amp, the IRED offers an optical output of 0.8 watts (W). Their 850 nm wavelength is barely discernible by humans, but lies firmly within the sensitivity range of the camera sensors.


#### **Press contact:**

Simon Thaler Phone +49 941 850 1693 Email: <u>simon.thaler@osram-os.com</u>

#### **Technical information:**


Phone +49 941 850 1700 Fax +49 941 850 3305 Email: <u>support@osram-os.com</u> Sales contacts: <u>www.osram-os.com/sales-contacts</u>



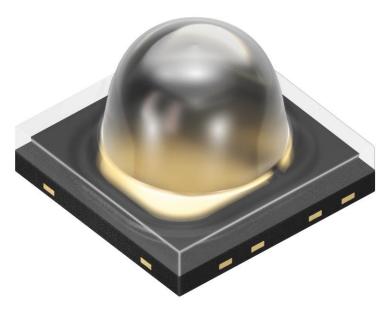

With the new SFH 4718A the Oslon Black family now offers a wide selection for the most varied of infrared-based applications, taking in four power classes, three wavelengths and three beam angles.

Image: Osram

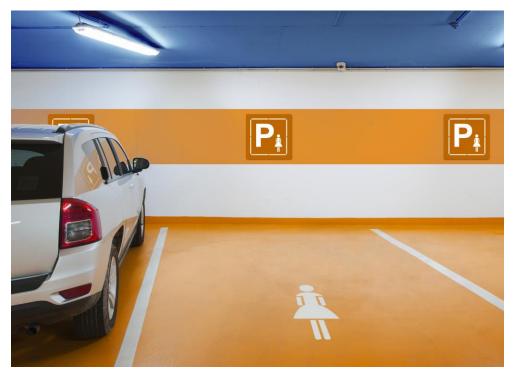

The new Oslon Black SFH 4718A provides the basis for compact and cost-effective infrared illumination units for camera systems with a medium capture range. Image: Osram



3/4

### ABOUT OSRAM

OSRAM, based in Munich, is a leading global high-tech company with a history dating back more than 110 years. Primarily focused on semiconductor-based technologies, our products are used in highly diverse applications ranging from virtual reality to autonomous driving and from smartphones to smart and connected lighting solutions in buildings and cities. OSRAM uses the endless possibilities of light to improve the quality of life for individuals and communities. OSRAM's innovations enable people all over the world not only to see better, but also to communicate, travel, work and live better. OSRAM has approximately 26,400 employees worldwide as of end of fiscal 2017 (September 30) and generated revenue of more than €4.1 billion. The company is listed on the stock exchanges in Frankfurt and Munich (ISIN: DE000LED4000; WKN: LED 400; trading symbol: OSR). Further information can be found at www.osram.com.

